## PREMIUM TRUCK SCISSOR DOCK LIFT - WL-100-6-68

\*\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE\*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

## STANDARD FEATURES

MODEL NUMBER: WL-100-6-68 UNIT TO BE MOUNTED: AT SURFACE OR IN PIT (CIRCLE ONE) CAPACITY (EVENLY DISTRIBUTED): 6,000 LBS OVERALL PLATFORM SIZE: (72" X 96") RAISED HEIGHT 68" ± 2"

LOWERED HEIGHT: 10"

REMOVABLE HANDRAILS AND 4"NON-REMOVABLE TOE BOARDS 42" HT W/ 21" MIDRAIL

TRUCK BRIDGE IS 72" W X 18" L AT

**ROLLER END W/ CHAINS & HANDLES** FRAME SIZE IS: 62" W X 93" L SHIPPING WT APPROX: 3200 LBS ± 6 1/2 HP POWER UNIT (SEE BOTTOM

OF PAGE)

W/8'OF HYDRAULIC HOSE -HAND-HELD CONTROL ON A 4'-20' COIL CORD

REFER TO THE UNIT'S ELECTRICAL DIAGRAM FOR

**ELECTRICAL SERVICE** REQUIREMENTS

-INSTALL TO MEET ALL APPLICABLE STATE & LOCAL


CODES FOR YOUR AREA!

5" BEVELED TOE GUARD ARCHITECTURAL REVIEW FOR **CORRECTNESS OF PIT AND FOR** COMPLIANCE TO LOCAL AND STATE CODES IS RECOMMENDED.


DIMENSION TOLERANCE ± 1/4"

## SPECIAL FEATURES

NONE

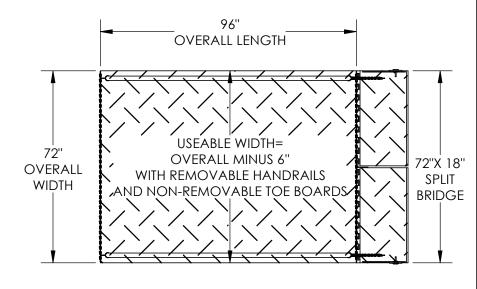

\*\* STANDARD UNIT NOT INTENDED FOR SIDE CROSS LOAD \*\*

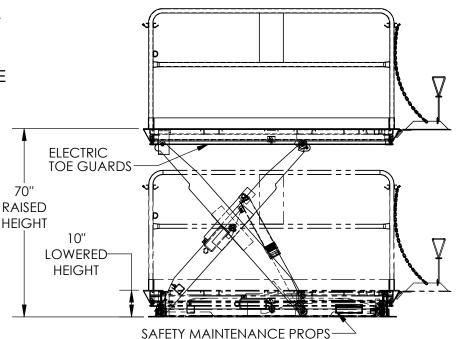

FOR INTERNAL USE ONLY PROJECT SIGN OFF Α **SALES** Ρ ENG. P FAB. R 0 **POWER** V HYDRAULIC UNIT OVERALL DIMENSIONS Α L 14"W x 33"L x 31"H (COMES W/ 8FT HOSE)

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE l As drawn [ ] As marked

Signed: Date:

> LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

